



Lexmark CX961tse

Versatile. Simple. Sustainable.















Lexmark CX961tse

With the new CX961tse color A3 multifunction printer, you get reassuring versatility, exceptional sustainability, and surprising simplicity from such sophisticated technology. Boost your productivity with vivid prints — up to 35 pages per minute*. Intuitively navigate the 10-inch (25 cm) color touchscreen, and save time with single-pass two-sided scanning. Effortlessly create everything your business requires, and custom configure your multifunction printer with interchangeable options tailored to your needs.

Versatile: Easy to Use

Create everything your business requires and anything you can imagine — from standard office documents to marketing brochures, booklets and posters — with broad media size support, high-volume printing, and exceptional paper handling and finishing capabilities.

Print vivid, colorful visualizations, charts and documents with professional color features (including PANTONE® calibration) and a full range of media sizes so you can effectively communicate your ideas.

Easily incorporate your multifunction printer into your workspace with a versatile, configurable design that saves space without sacrificing performance.

Boost your productivity with our rich suite of cutting-edge software and solutions with broad capabilities including scanning paper files directly into your cloud-based storage systems and automatically translating documents into 100+languages.

Further your organization's digital transformation with direct integration into your critical workflows and core business systems using these IoT-enabled devices.



Simple: Easy to Manage

Quickly do what you need to do using an intuitive operator panel and easy-to-follow navigation.

Easily maintain your devices with one-handed toner replacement, easy-to-reach serviceable areas, and alerts that are simple to understand.

Enjoy the peace of mind of knowing you are protected by the industry's most comprehensive security portfolio, right out of the box.

Keep your business running with exceptional reliability, industry-leading durability, and long-lasting toner and supplies.

Rest easy that every aspect of your device is made to work together seamlessly thanks to Lexmark's core technology ownership.

Sustainable: Easy to feel good about

Feel good about your purchase and help meet your own sustainability goals with our world-class practices and independent third-party certifications.

Do your part for the planet with our industry-leading use of post-consumer recycled materials and our award-winning cartridge recycling program.

Save energy — and money — with technology that exceeds strict global standards for energy efficiency.


Minimize your impact on the environment with a company that focuses on sustainability throughout the product lifecycle from design through use, end of life and beyond.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

^{*} Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

^{**} Fax icon shown on the operator panel when Fax Server is enabled, Fax Over IP is configured, etherFAX is configured, or an optional Analog Modem is installed.

Lexmark CX961tse

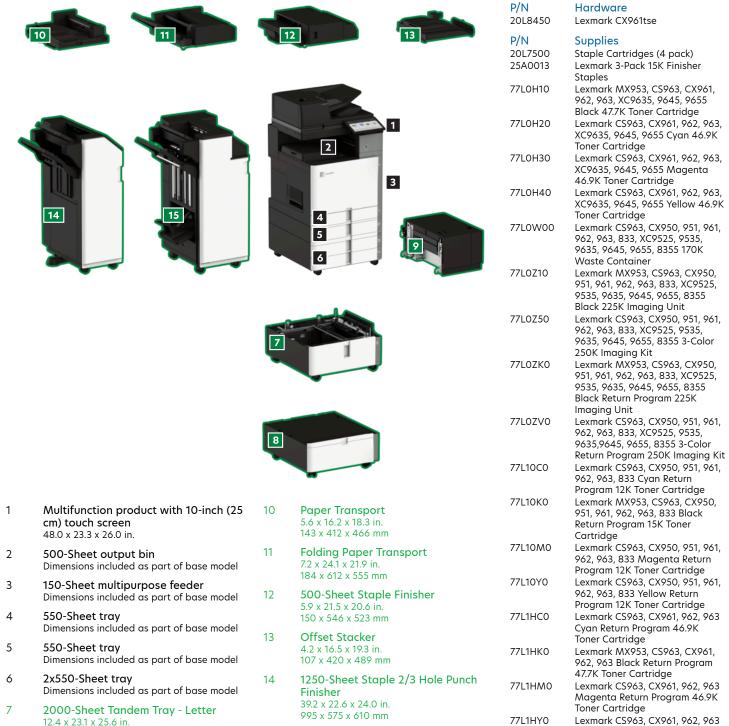

314 x 587 x 649 mm

9 **1500-Sheet High-Capacity Tray** 11.4 x 13.5 x 21.4 in. 290 x 342 x 545 mm 15 2250-Sheet Booklet Staple 2/3 Hole Punch Finisher
39.2 x 25.6 x 24.1 in.
995 x 650 x 613 mm

Standard

Optional

P/N **Paper Handling** 550-Sheet Tray 20L8800 20L8801 2 x 550-Sheet Tray 20L8802 2000-Sheet Tandem Tray - A4 20L8803 2000-Sheet Tandem Tray - Letter 20L8804 1500-Sheet High-Capacity Tray 20L8808 Special Media Tray 20L8809 500-sheet Staple Finisher 2025 20L8810 500-Sheet Staple Finisher 20L8811 Folding Paper Transport 1250-Sheet Staple 2/3 Hole 20L8812 **Punch Finisher** 20L8813 1250-Sheet Staple 2/4 Hole Punch Finisher

Toner Cartridge

Yellow Return Program 46.9K

20L8814 2250-Sheet Booklet Staple 2/3 Hole Punch Finisher 20L8815 2250-Sheet Booklet Staple 2/4 Hole Punch Finisher 20L8816 Offset Stacker 20L8817 Paper Transport 20L8825 1250-Sheet Staple Finisher 2/3 Hole Punch Kit for 500-Sheet 20L8841 Staple Finisher 20L8842 2/4 Hole Punch Kit for 500-Sheet Staple Finisher P/N **Memory Options** 27X0420 500GB Hard Disk Drive (SATA) 57X0070 Removable Hard Disk Enclosure P/N **Application Solutions** 57X0210 Elatec Reader Authentication Device 57X0225 Desktop Contactless Reader Contactless Front Solutions 57X0235 Module (Primary) 57X0300 **Contact Authentication Device** 57X0301 Contactless Authentication Device 82S1203 IPDS License 82S1204 Bar Code License P/N Connectivity 1021231 Parallel Cable (10-foot) 1021294 USB Cable (2-meter) RS-232C Serial Interface Card 14F0100 27X0142 Lexmark MarkNet™ N8230 Fiber **Ethernet Print Server** 37X6146 Fax Card Option 57X7040 English Keyboard Kit SPD0001 Surge Protective Device, 110-120V

Furniture

Keyboard Shelf

Cabinet

P/N

20L8806

20L8807

You can install one 1,500-Sheet high-capacity tray.

You can install one 500-Sheet staple finisher, one Offset stacker or one Folding paper transport unit.

Vous pouvez installer une trousse de poinçonnage pour l'unité de finition avec agrafage de 500 feuilles, mais vous devez l'installer avec un finisseur d'agrafes de 500 feuilles 2025. Les MFP (appareils multifonctionnels) fabriqués avant mai 2025 ont besoin d'un couvercle arrière supérieur pour terminer l'installation. La trousse de poinçonnage nécessite la version 25 ou ultérieure du micrologiciel.

Vous pouvez installer une unité de finition avec agrafage et perforation de 1 250 feuilles, une unité de finition avec agrafage de 1 250 feuilles, ou une unité de finition de livret avec agrafage et perforation de 2 250 feuilles, mais vous devez également installer une unité de transport du papier ou une unité de transport du papier plié. L'unité de finition avec agrafage à 1 250 feuilles nécessite la version 25 ou ultérieure du micrologiciel.

Product Specifications	Lexmark CX961tse				
Printing					
Display	Lexmark e-Task 10.1-inch (25.6 cm) color touch screen				
Print Speed	Up to: Black: 35 ppm ¹ (Letter) / Color: 35 ppm ¹ (Letter)				
Time to First Page	As fast as: Black: 7.1 seconds / Color: 8.2 seconds				
Print Resolution	Black: 1200 x 1200 dpi, 4800 Color Quality / Color: 4800 Color Quality, 1200 x 1200 dpi				
Memory	Standard: 4 GB / Maximum: 4 GB				
Hard Disk	Intelligent Storage Drive included; Magnetic Hard Disk (optional)				
Recommended Monthly Page Volume	7000 - 50000 pages ²				
Maximum Monthly Duty Cycle	Up to: 150 000 pages per month ³				
Copying					
Copy Speed	Up to: Black: 35 cpm 1 (Letter) / Color: 35 cpm 1 (Letter)				
Time to First Copy	As fast as: Black: 8.5 seconds / Color: 9.5 seconds				
Scanning					
Scanner Type / ADF Scan	Flatbed scanner with automatic document feeder / DADF (single pass Duplex)				
A4/Ltr Duplex Scan Speed	Up to: Black: 240/240 sides per minute / Color: 240/240 sides per minute				
A4/Ltr Simplex Scan Speed	Up to: Black: 120/120 sides per minute / Color: 120/120 sides per minute				
ADF Paper Input Capacity	Up to: 300 pages 20 lb or 75 gsm bond				
Supplies ⁴					
Laser Cartridge Yields	up to: 46,900 ⁵ -page Color (CMY) Cartridges / up to: 47,700 ⁵ -page Black Cartridge				
Imaging Unit Estimated Yield	Up to: 225,000 (black) and 250,000 (color) pages, based on 5 average letter/A4 size pages per print job and ~ 5% coverage for CS/CX96 CX83x, CX95x, and MX95x printer series, or based on 3 average letter/A4 size pages per print job and ~ 5% coverage for all other printer				
Cartridge(s) Shipping with Product	15,000 ⁵ -page Black Toner Cartridge ⁵ , 12,000 ⁵ -page Color (CMY) Toner Cartridges ⁵				
Paper Handling					
Included Paper Handling	500-Sheet Output Bin, 550-Sheet Tray, 550-Sheet Tray, 2 x 550-Sheet Tray, 150-Sheet Multipurpose Feeder				
Optional Paper Handling	2,250-Sheet Booklet Staple Hole Punch Finisher, 500-Sheet Staple Offset Finisher, Folding Paper Transport Unit, 1,250-Sheet Staple Hole Punch Finisher, Offset Stacker, 1,500-Sheet High-Capacity Tray, Paper Transport Unit, 2000-Sheet Tandem Tray, Cabinet				
Paper Input Capacity	Up to: Standard: 2350 pages 20 lb or 75 gsm bond / Maximum: 3850 pages 20 lb or 75 gsm bond				
Paper Output Capacity	Up to: Standard: 500 pages 20 lb or 75 gsm bond / Maximum: 2650 pages 20 lb or 75 gsm bond				
Media Types Supported	Vinyl Labels, Labels, Card Stock, Plain Paper, Envelopes, Glossy Paper, Refer to the Paper & Specialty Media Guide				
Media Sizes Supported	A6, Oficio, 12 x 18", 7 3/4 Envelope, JIS-B4, 9 Envelope, JIS-B5, A3, Ledger, A4, Legal, SRA3, A5, Hagaki Card, Letter, B5 Envelope, C4 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope				
General Information					
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), 802.11a/b/g/n/ac + Apple iBeacon, USB 2. Specification Hi-Speed Certified (Type B)				
Optional Network Ports / Optional Local Ports	MarkNet N8230 Fiber Ethernet Print Server / Internal 1284-B Bidirectional Parallel, Internal RS-232C serial				
Noise Level	Operating: 46 dBA (Print) / 52 dBA (Copy) / 50 dBA (Scan)				
Specified Operating Environment	Altitude: 0 - 2896 Meters (9,500 Feet) / Humidity: 15 to 80% Relative Humidity / Temperature: 10 to 32.2°C (50 to 90°F)				
Limited Warranty	See Statement of Limited Warranty: 1-Year Onsite Repair, Next Business Day				
Size / Weight	H x W x D: 48.0 x 23.3 x 26.0 in. / 265.5 lb.				
ENERGY STAR Typical Electricity Consumption	TEC: 0.58 kilowatt-hours per week				

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

1 Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2024 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (http://www.openssl.org/).



² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798.